
FALL BREAK

BREAK

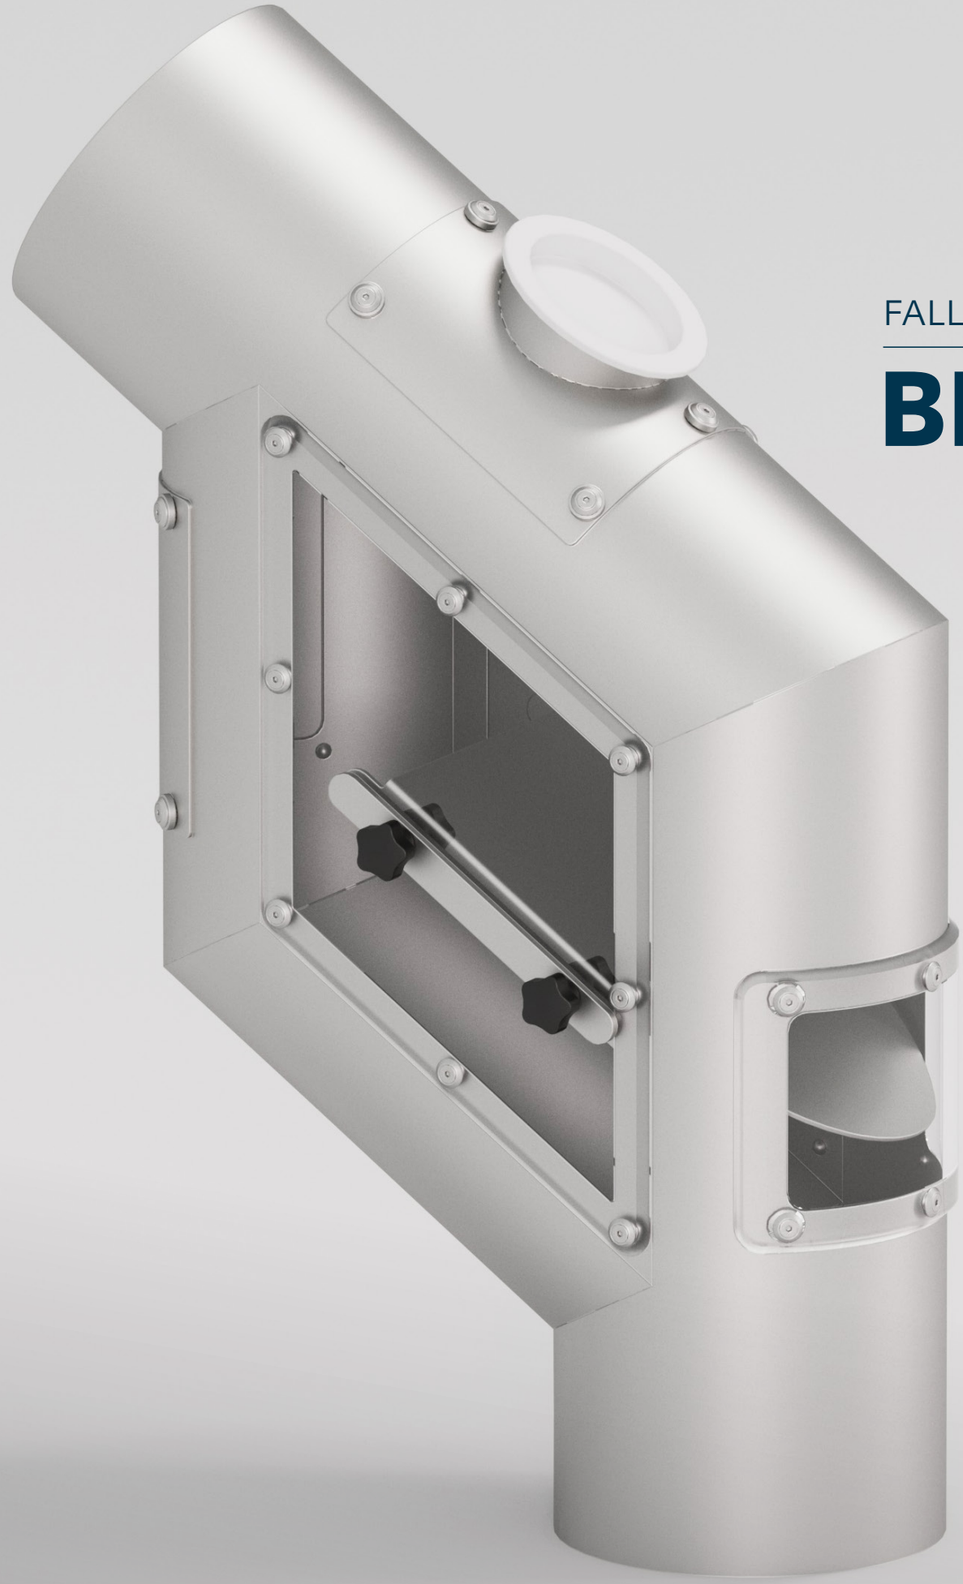

SWISCA AG
Wührestrasse 14
9050 Appenzell


+41 71 552 44 00
info@swisca.com
www.swisca.com

FALL BREAK


BREAK

The BREAK fall brake is built for gravity pipes in the flour mill's cleaning section to control the product flow. It is available in diameters Ø150 and Ø200 mm and comes in two distinct design versions for vertical or inclined pipe routing. By implementing an adjustable slide gate, the system allows for precisely controlled product accumulation and throughput, protecting downstream machinery and pipe bends from high fall velocities and grain-induced abrasion.

Vertical



Inclined



Type	Diameter D / d mm	Height H mm	Width W mm	Angle mm
D150/35 Vertical	154 / 150	552	376	35°
D150/35 Inclined	154 / 150	552	376	35°
D200/35 Vertical	204 / 200	773	519	35°
D200/35 Inclined	204 / 200	773	519	35°

BREAK ensures maximum equipment protection by creating a stable product cushion, which allows falling grain to impact gently, significantly reducing wear and tear on the system. Constructed from stainless steel, the unit guarantees durability and meets the highest hygiene standards. The integrated sight glass and control spout provide optimal monitoring and easy access, ensuring that the material flow remains visible and controllable at all times.



Benefits

+ Controlled product accumulation/throughput
+ Optimal monitoring and easy access
+ Robust and food safe