




PICKUP SHOE

PICUP

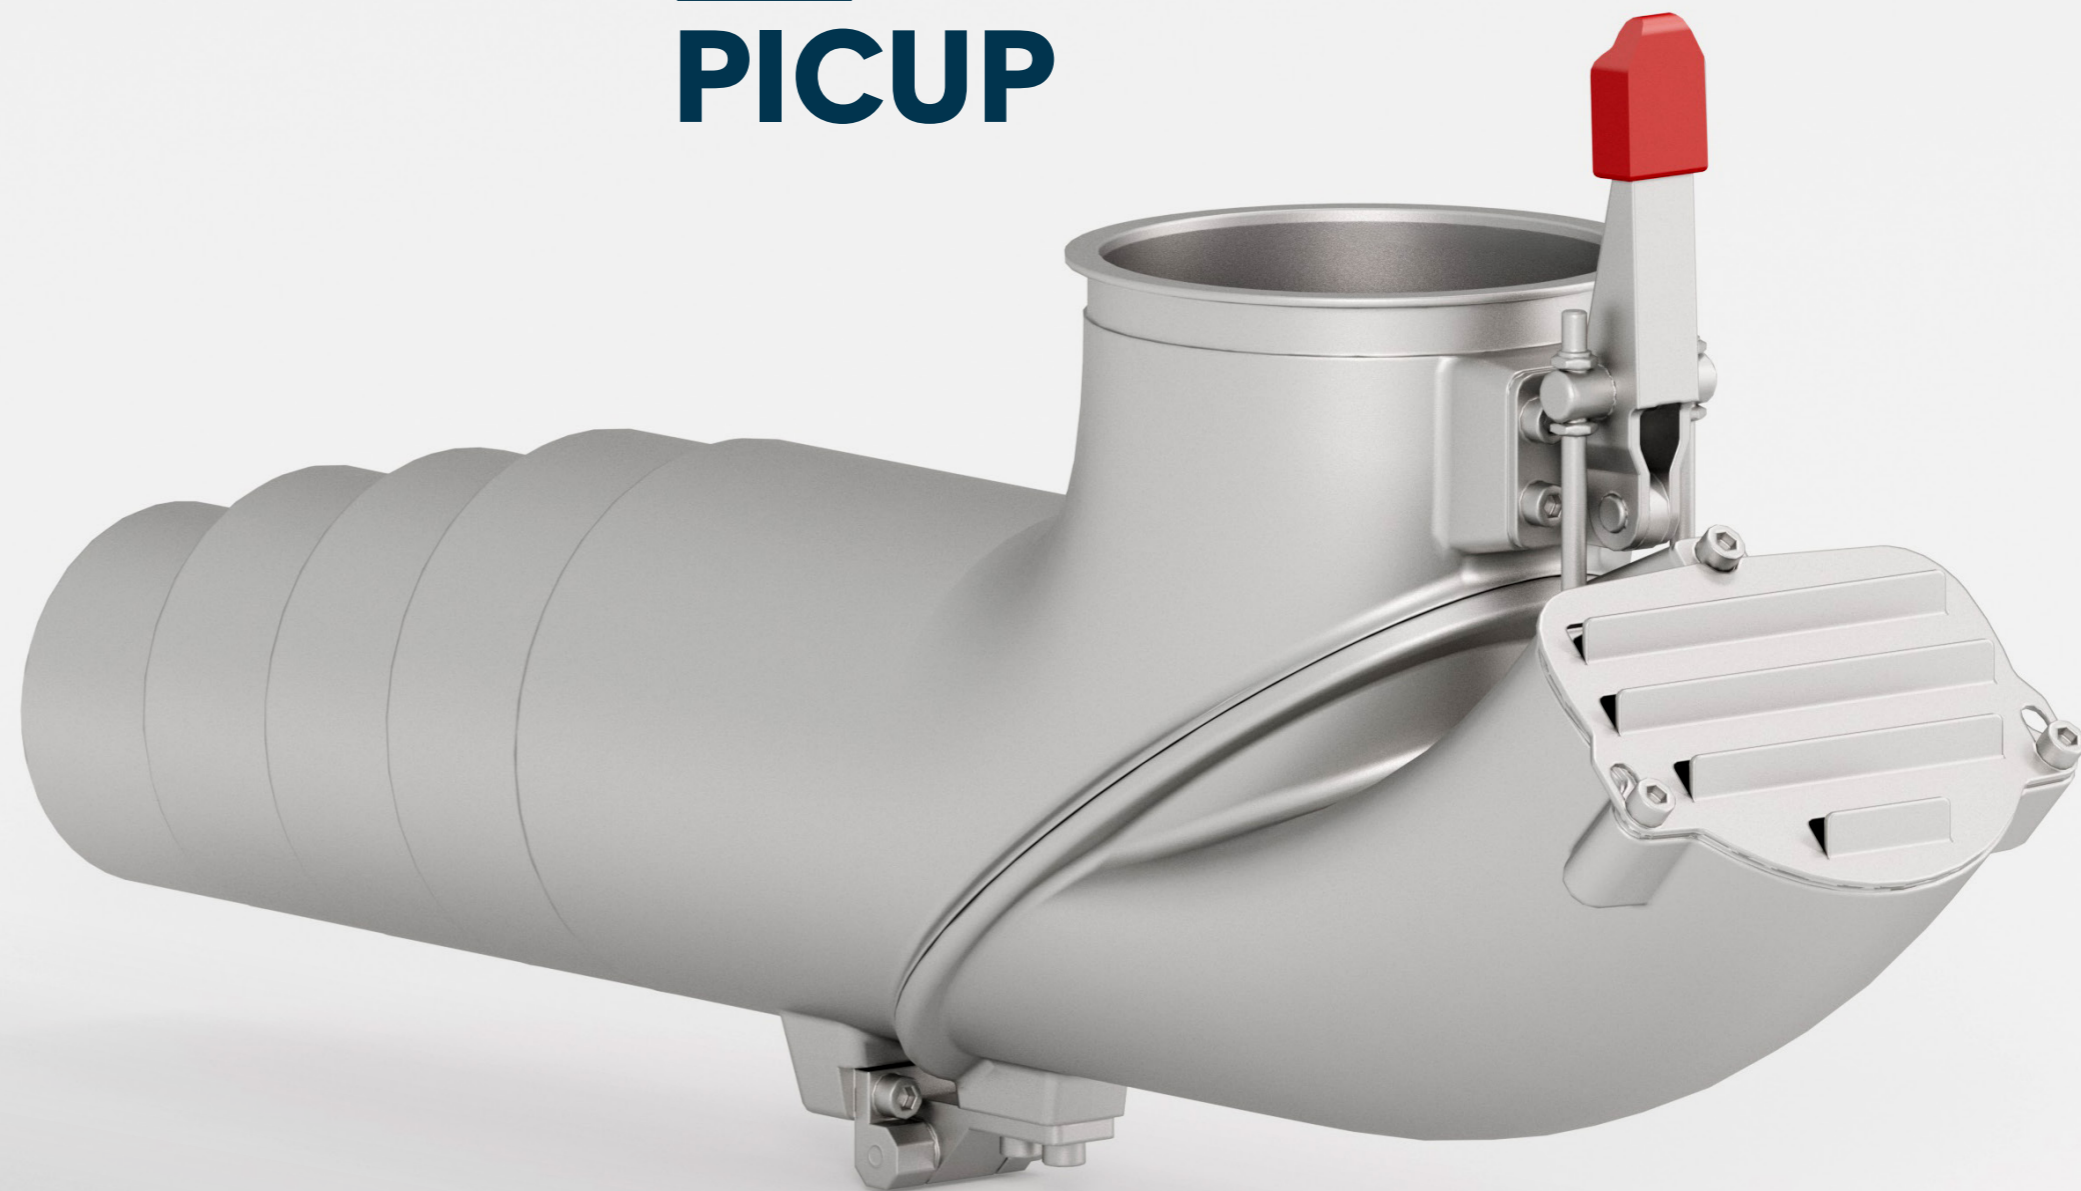


SWISCA AG
Wührestrasse 14
9050 Appenzell

+41 71 552 44 00
info@swisca.com
www.swisca.com

PICUP

The 90° PICUP bend is specifically designed for mill pneumatic systems, serving as a critical connection between roller mills and riser pipes. It is available with inlet diameters of Ø120 and Ø150 and is compatible with pneumatic conveying lines ranging from Ø45 to Ø154. For systems with pipe diameters of Ø88.9 and above, the PICUP is equipped with an adjustable air intake to ensure consistent process stability and optimal airflow.

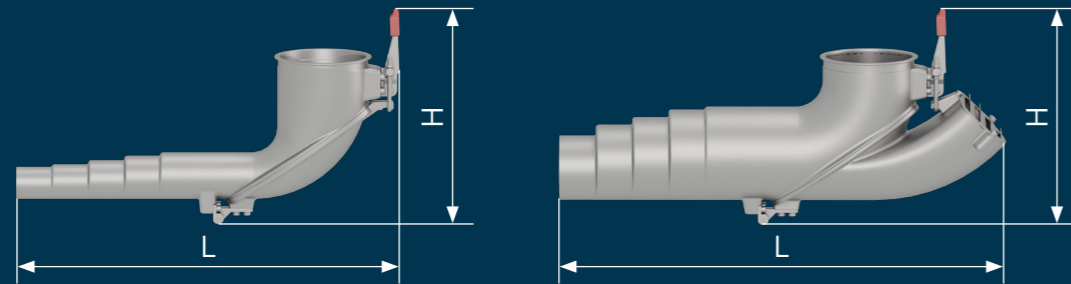

Type	Inlet D / d	Outlet D	Length L	Height H
120 / 45	135 / 120	45	531	298
120 / 48.3	135 / 120	48.3	481	298
120 / 54	135 / 120	54	430	298
120 / 60.3	135 / 120	60.3	380	298
120 / 65	135 / 120	65	330	298
120 / 70	135 / 120	70	481	298
120 / 76.1	135 / 120	76.1	430	298
120 / 80	135 / 120	80	380	298
120 / 84	135 / 120	84	330	298
120 / 88.9	135 / 120	88.9	613.9	298
120 / 104	135 / 120	104	561.9	298
120 / 114.3	135 / 120	114.3	511.9	298
120 / 125	135 / 120	125	461.9	298
120 / 129	135 / 120	129	412.9	298
150 / 139.7	Introduction Q4 2026			
150 / 154	Introduction Q4 2026			

For effortless cleaning and maintenance, the PICUP features a hinged housing cover with a quick-release fastener, allowing for instant access and rapid clearing in the event of a product blockage. The robust stainless-steel casting is intentionally designed without seals or textile components, which significantly reduces maintenance requirements and ensures maximum operational reliability under demanding conditions.



Quick-release fastener for easy access

Robust, stainless-steel casting parts without seals

Inclined air inlet preventing product leakage

Benefits

- + Fold-down cleaning hatch
- + Adjustable air inlet
- + Stainless-steel casting